


LeoFlon

TRIPLE INSULATED LITZ WIRE (0.100mm SERIES)


CAT NO.	TRW(F)–0.1/7	TRW(F)–0.1/9	TRW(F)–0.1/11	TRW(F)–0.1/13
Single Wire (Conductor)				
Overall Diameter (mm)	0.100 (±0.003)			
Max Resistance (Ω/M)	2.381			
Triple Insulated Litz Wire				
Strands	7	9	11	13
Insulation Thickness (mm)	0.10	0.10	0.10	0.10
Overall Diameter (mm)	0.58 (±0.10)	0.60 (±0.10)	0.63 (±0.10)	0.65 (±0.10)
Temperature Rating	CLASS F 155 °C			
Breakdown Voltage (V)	> 6000			
Max Resistance (Ω/M)	0.34695	0.26985	0.22078	0.18682
Cross–sectional Area (mm ²)	0.05495	0.07065	0.08635	0.10205
Approx. Weight (g/M)	0.741	0.910	1.077	1.241

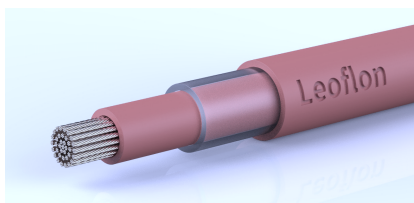

LeoFlon

TRIPLE INSULATED LITZ WIRE (0.100mm SERIES)


CAT NO.	TRW(F)–0.1/17	TRW(F)–0.1/19	TRW(F)–0.1/21	TRW(F)–0.1/25
Single Wire (Conductor)				
Overall Diameter (mm)	0.100 (±0.003)			
Max Resistance (Ω/M)	2.381			
Triple Insulated Litz Wire				
Strands	17	19	21	25
Insulation Thickness (mm)	0.10	0.10	0.10	0.10
Overall Diameter (mm)	0.72 (±0.10)	0.74 (±0.10)	0.77 (±0.10)	0.83 (±0.10)
Temperature Rating	CLASS F 155 °C			
Breakdown Voltage (V)	> 6000			
Max Resistance (Ω/M)	0.14286	0.12782	0.11565	0.09714
Cross–sectional Area (mm ²)	0.13345	0.14915	0.16485	0.19625
Approx. Weight (g/M)	1.567	1.782	1.952	2.299

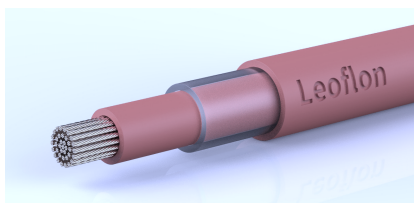

LeoFlon

TRIPLE INSULATED LITZ WIRE (0.100mm SERIES)


CAT NO.	TRW(F)–0.1/30	TRW(F)–0.1/40	TRW(F)–0.1/42	TRW(F)–0.1/45
Single Wire (Conductor)				
Overall Diameter (mm)	0.100 (±0.003)			
Max Resistance (Ω/M)	2.381			
Triple Insulated Litz Wire				
Strands	30	40	42	45
Insulation Thickness (mm)	0.10	0.10	0.10	0.10
Overall Diameter (mm)	0.85 (±0.10)	0.95 (±0.10)	1.00 (±0.10)	1.06 (±0.10)
Temperature Rating	CLASS F 155 °C			
Breakdown Voltage (V)	> 6000			
Max Resistance (Ω/M)	0.08095	0.06072	0.05782	0.05397
Cross–sectional Area (mm ²)	0.23550	0.31400	0.32970	0.35325
Approx. Weight (g/M)	2.751	3.552	3.711	3.949

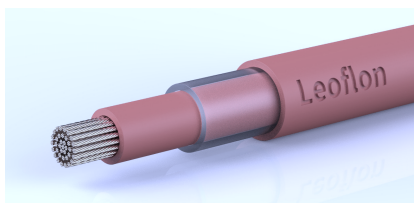

LeoFlon

TRIPLE INSULATED LITZ WIRE (0.100mm SERIES)


CAT NO.	TRW(F)–0.1/49	TRW(F)–0.1/50	TRW(F)–0.1/55	TRW(F)–0.1/66
Single Wire (Conductor)				
Overall Diameter (mm)	0.100 (±0.003)			
Max Resistance (Ω/M)	2.381			
Triple Insulated Litz Wire				
Strands	49	50	55	66
Insulation Thickness (mm)	0.10	0.10	0.10	0.10
Overall Diameter (mm)	1.13 (±0.10)	1.14 (±0.10)	1.16 (±0.10)	1.23 (±0.10)
Temperature Rating	CLASS F 155 °C			
Breakdown Voltage (V)	> 6000			
Max Resistance (Ω/M)	0.05105	0.05003	0.04548	0.03790
Cross–sectional Area (mm ²)	0.38465	0.39250	0.43175	0.51810
Approx. Weight (g/M)	4.265	4.344	4.738	5.599

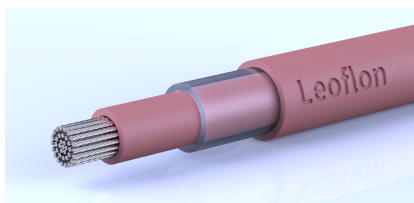

LeoFlon

TRIPLE INSULATED LITZ WIRE (0.100mm SERIES)


CAT NO.	TRW(F)–0.1/70	TRW(F)–0.1/80	TRW(F)–0.1/84	TRW(F)–0.1/90
Single Wire (Conductor)				
Overall Diameter (mm)	0.100 (±0.003)			
Max Resistance (Ω/M)	2.381			
Triple Insulated Litz Wire				
Strands	70	80	84	90
Insulation Thickness (mm)	0.10	0.10	0.10	0.10
Overall Diameter (mm)	1.27 (±0.15)	1.34 (±0.15)	1.39 (±0.15)	1.41 (±0.15)
Temperature Rating	CLASS F 155 °C			
Breakdown Voltage (V)	> 6000			
Max Resistance (Ω/M)	0.03574	0.03127	0.02978	0.02779
Cross–sectional Area (mm ²)	0.54950	0.62800	0.65940	0.70650
Approx. Weight (g/M)	5.911	6.688	6.998	7.462

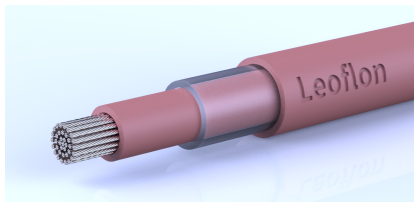

LeoFlon

TRIPLE INSULATED LITZ WIRE (0.100mm SERIES)


CAT NO.	TRW(F)–0.1/95	TRW(F)–0.1/100	TRW(F)(L)–0.1/105	TRW(F)(L)–0.1/120
Single Wire (Conductor)				
Overall Diameter (mm)	0.100 (±0.003)			
Max Resistance (Ω/M)	2.381			
Triple Insulated Litz Wire				
Strands	95	100	105	120
Insulation Thickness (mm)	0.10	0.10	0.10	0.10
Overall Diameter (mm)	1.45 (±0.15)	1.48 (±0.15)	1.50 (±0.15)	1.55 (±0.15)
Temperature Rating	CLASS F 155 °C			
Breakdown Voltage (V)	> 6000			
Max Resistance (Ω/M)	0.02633	0.02501	0.02429	0.02125
Cross–sectional Area (mm ²)	0.74575	0.78500	0.82425	0.94200
Approx. Weight (g/M)	7.848	8.234	8.619	9.771

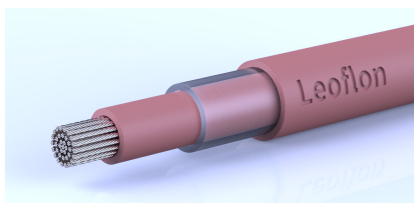

LeoFlon

TRIPLE INSULATED LITZ WIRE (0.100mm SERIES)


CAT NO.	TRW(F)(L)–0.1/125	TRW(F)(L)–0.1/133	TRW(F)(L)–0.1/140	TRW(F)(L)–0.1/150
Single Wire (Conductor)				
Overall Diameter (mm)	0.100 (±0.003)			
Max Resistance (Ω/M)	2.381			
Triple Insulated Litz Wire				
Strands	125	133	140	150
Insulation Thickness (mm)	0.10	0.10	0.10	0.10
Overall Diameter (mm)	1.61 (±0.15)	1.65 (±0.15)	1.70 (±0.15)	1.76 (±0.15)
Temperature Rating	CLASS F 155 °C			
Breakdown Voltage (V)	> 6000			
Max Resistance (Ω/M)	0.02040	0.01918	0.01822	0.01700
Cross–sectional Area (mm ²)	0.98125	1.04405	1.09900	1.17750
Approx. Weight (g/M)	10.154	10.766	11.301	12.064

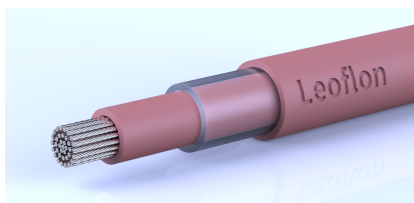

LeoFlon

TRIPLE INSULATED LITZ WIRE (0.100mm SERIES)


CAT NO.	TRW(F)(L)–0.1/160	TRW(F)(L)–0.1/180	TRW(F)(L)–0.1/200	TRW(F)(L)–0.1/210
Single Wire (Conductor)				
Overall Diameter (mm)	0.100 (±0.003)			
Max Resistance (Ω/M)	2.381			
Triple Insulated Litz Wire				
Strands	160	180	200	210
Insulation Thickness (mm)	0.10	0.10	0.10	0.10
Overall Diameter (mm)	1.80 (±0.15)	1.95 (±0.15)	2.04 (±0.15)	2.10 (±0.15)
Temperature Rating	CLASS F 155 °C			
Breakdown Voltage (V)	> 6000			
Max Resistance (Ω/M)	0.01594	0.01417	0.01275	0.01215
Cross–sectional Area (mm ²)	1.25600	1.41300	1.57000	1.64850
Approx. Weight (g/M)	12.826	14.347	15.864	16.621

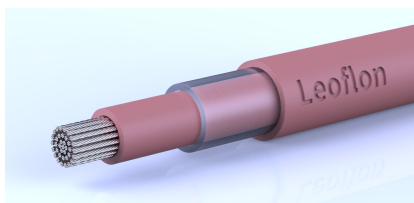

LeoFlon

TRIPLE INSULATED LITZ WIRE (0.100mm SERIES)


CAT NO.	TRW(F)(L)–0.1/225	TRW(F)(L)–0.1/250	TRW(F)(L)–0.1/275	TRW(F)(L)–0.1/300
Single Wire (Conductor)				
Overall Diameter (mm)	0.100 (±0.003)			
Max Resistance (Ω/M)	2.381			
Triple Insulated Litz Wire				
Strands	225	250	275	300
Insulation Thickness (mm)	0.10	0.10	0.10	0.10
Overall Diameter (mm)	2.11 (±0.15)	2.27 (±0.15)	2.35 (±0.15)	2.47 (±0.15)
Temperature Rating	CLASS F 155 °C			
Breakdown Voltage (V)	> 6000			
Max Resistance (Ω/M)	0.01134	0.01020	0.00927	0.00850
Cross–sectional Area (mm ²)	1.76625	1.96250	2.15875	2.35500
Approx. Weight (g/M)	17.755	19.643	21.527	23.409

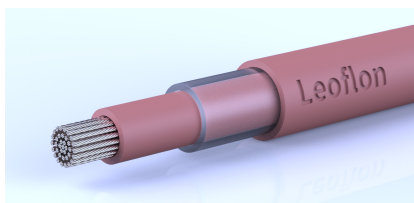

LeoFlon

TRIPLE INSULATED LITZ WIRE (0.100mm SERIES)

CAT NO.	TRW(F)(L)–0.1/325	TRW(F)(L)–0.1/350	TRW(F)(L)–0.1/375	TRW(F)(L)–0.1/400
Single Wire (Conductor)				
Overall Diameter (mm)	0.100 (±0.003)			
Max Resistance (Ω/M)	2.381			
Triple Insulated Litz Wire				
Strands	325	350	375	400
Insulation Thickness (mm)	0.10	0.10	0.10	0.10
Overall Diameter (mm)	2.65 (±0.15)	2.75 (±0.15)	2.85 (±0.15)	2.88 (±0.15)
Temperature Rating	CLASS F 155 °C			
Breakdown Voltage (V)	> 6000			
Max Resistance (Ω/M)	0.00785	0.00729	0.00680	0.00638
Cross–sectional Area (mm ²)	2.55125	2.74750	2.94375	3.14000
Approx. Weight (g/M)	25.287	27.163	29.037	30.910

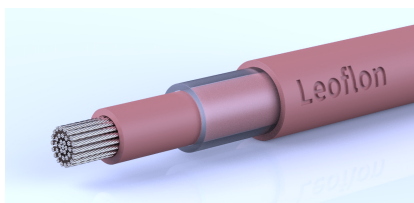

LeoFlon

TRIPLE INSULATED LITZ WIRE (0.100mm SERIES)

CAT NO.	TRW(F)(L)–0.1/425	TRW(F)(L)–0.1/450	TRW(F)(L)–0.1/475	TRW(F)(L)–0.1/500
Single Wire (Conductor)				
Overall Diameter (mm)	0.100 (±0.003)			
Max Resistance (Ω/M)	2.381			
Triple Insulated Litz Wire				
Strands	425	450	475	500
Insulation Thickness (mm)	0.10	0.10	0.10	0.10
Overall Diameter (mm)	2.90 (±0.15)	2.95 (±0.15)	3.08 (±0.15)	3.20 (±0.15)
Temperature Rating	CLASS F 155 °C			
Breakdown Voltage (V)	> 6000			
Max Resistance (Ω/M)	0.00600	0.00567	0.00537	0.00510
Cross–sectional Area (mm ²)	3.33625	3.53250	3.72875	3.92500
Approx. Weight (g/M)	32.780	34.649	36.517	38.383